


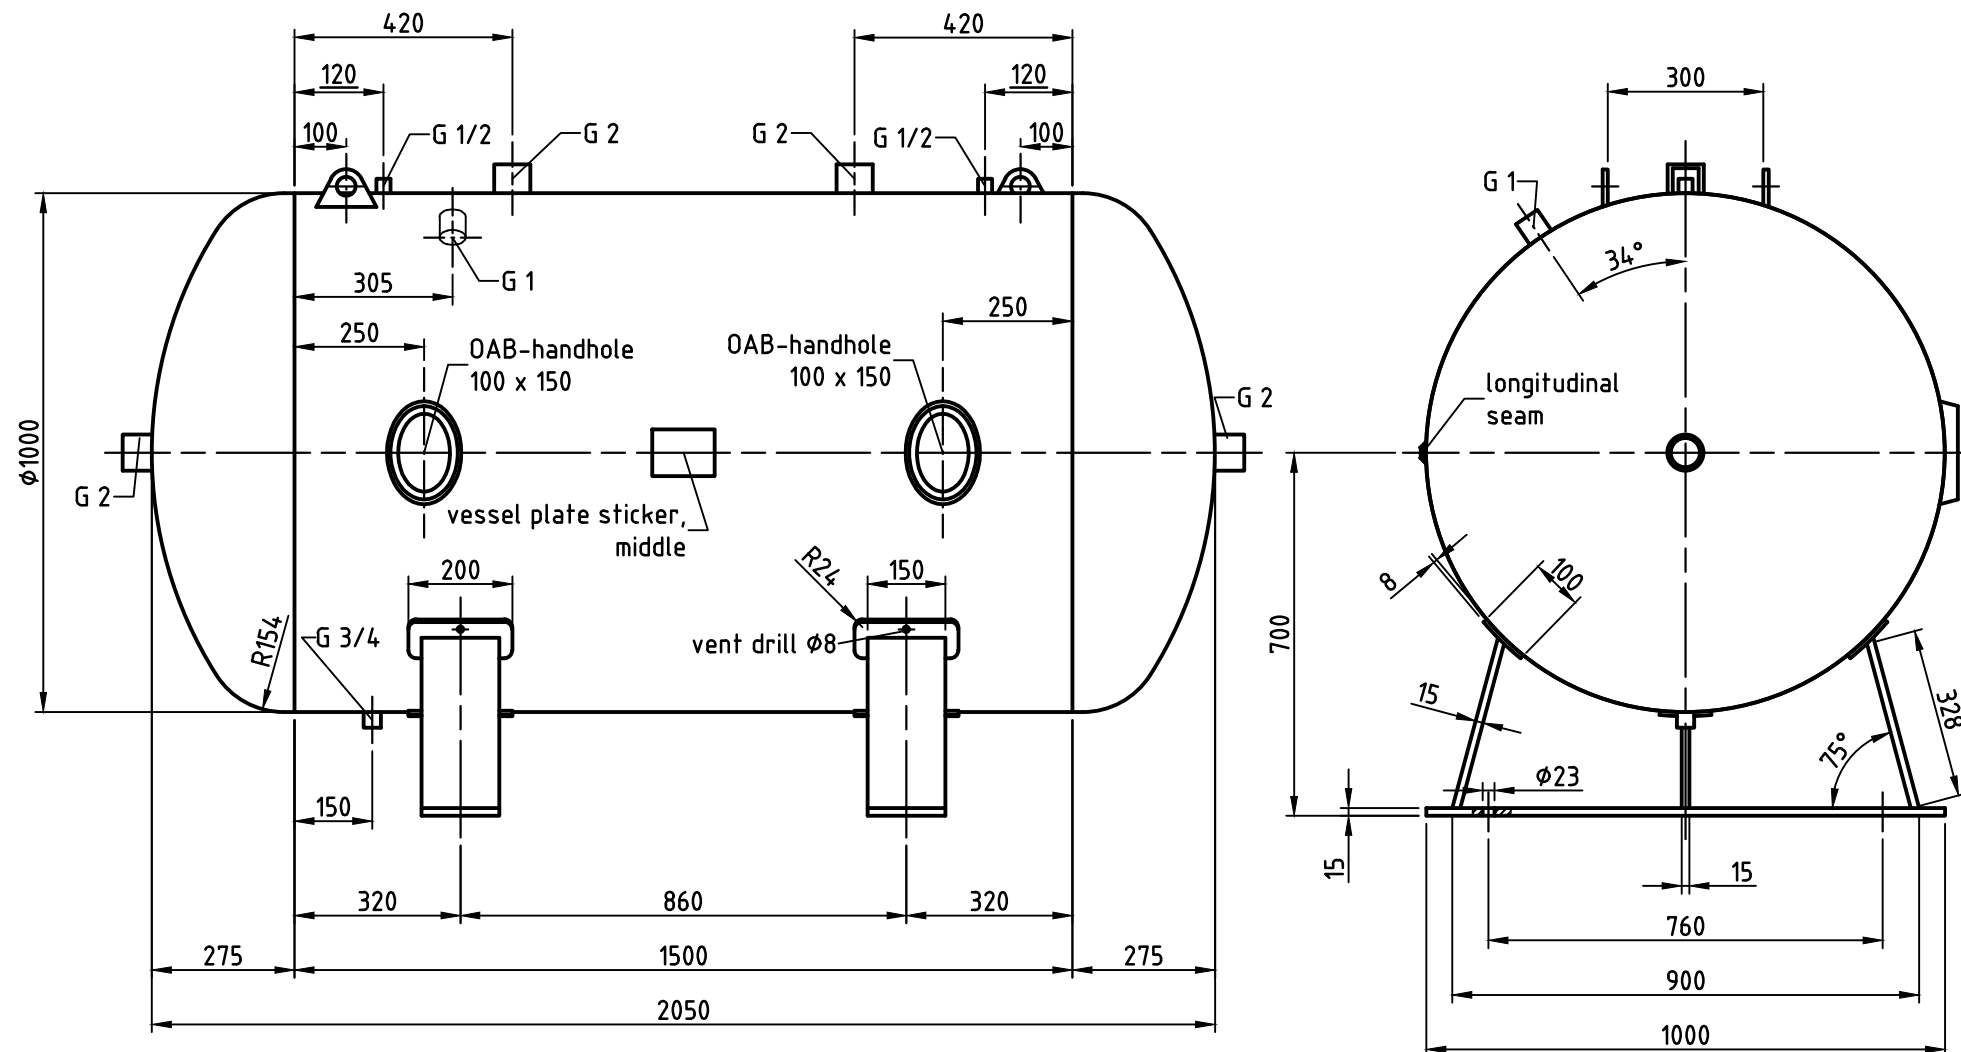





socket welding
drain and plug socket
inside flush



OAB 51 - handhole 100/150
tested components

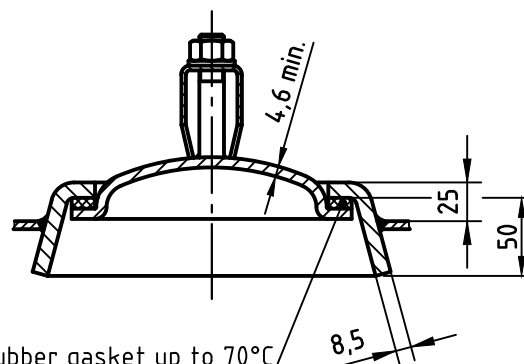

SEAMS (unless otherwise indicated on drawing):

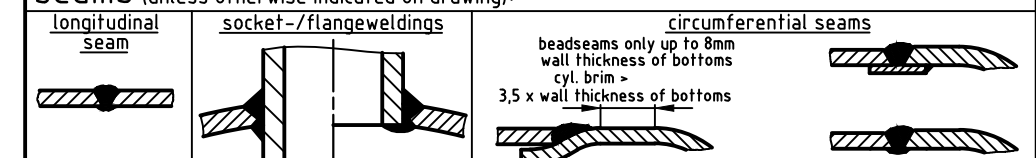

pressure variation :

pressure swing 0-11 bar max. operations 1.000

infinite operation of pressure swing within 20% of 11 bar

operational characteristics / calculation characteristics :

volume V (litre) : 1500
max. working pressure PS (bar) : 16
test pressure PT (bar) : 22,88
min. working temp. TS (°C) : -20
max. working temp TS (°C) : 50
fluid : compressed air/nitrogen (fluid group 2)
location : inside and outside building possible

coating :

inside : raw
outside : primed (if customer wishes lacquered)

manufacturing and testing

acc. to PED 2014 / 68 / EU - AD 2000

conformity benchmark :

fluid group : 2
diagram : 2
categorie : IV
module : H1

scale:	1:15			description: pressure vessel horizontal 1500 l 16 bar			
our no.:	-						
order no.:	-						
used for:	M+B Standardvessel		date	name	drawing no.: MB 020102-2.1500G/E	revision: A	
weight:	ca. 480 kg	compl.	24.06.2015	CW			
sheet:	1	appr.	24.06.2015	SW			
of sheet:	1	follow protection mark acc. DIN 34				drawing no. of design inspection: MB 020102-2	date of revision: 24.06.2015
date of plot:	24.06.2015						
file:	ENG-010830						